

THE WORLD LEADER IN FUME EXTRACTION TECHNOLOGY



BOFA's AD 500 iQ mid to high end laser fume extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has been further enhanced with the inclusion of several features including BOFA's acclaimed iQ Operating System, making the AD 500 iQ one of the most advanced systems available.


The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

STANDARD FEATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air filter technology
- DeepPleat DUO pre filter
- Combined HEPA/Gas filter incorporating ACF technology
- Automatic flow control system
- Real time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB
- Filters with long life and low replacement cost

OPTIONAL FEATURES:

- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing with host laser
- On-board compressor
- Optional filter medias

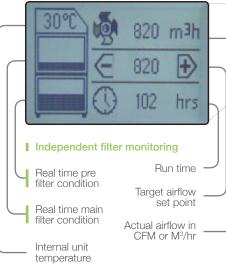

Affordable high

performance laser fume

applications in the laser

extraction system for

marking, coding and

engraving industries.









For high performance and long filter life

UNITS - PART NUMBERS			OPTIONS			
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor
AD 500 iQ Stainless Steel	230V	L0672	A2001	A2002	A2003	A2007
	115V	L0671				
AD 500 iQ Powder Coated	230V	L0662				
	115V	L0661				

REPLACEMENT FILTERS - PART NUMBERS			
Model DeepPleat DUO Pre Filter		Combined HEPA/Gas Filter	
AD 500 iQ	A1030222	A1030297	

TECHNICAL DATA		
	230V	115V
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"
Cabinet Construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / Pressure	550m³/hr / 100mbar	324cfm / 100mbar
Electrical Data	230v 1ph 50/60Hz Full load current: 9.5 amps / 1.1kw	115v 60/50Hz Full load current: 14.8 amps / 1.1kw
Noise Level	< 60dBA*	< 60dBA*
Weight	135kgs	298lbs
Approvals	CE	CE

DEEPPLEAT DUO PF SPECIFICATIONS	RE FILTER
Surface Media Area	30m² approx
Filter Media	Glass Fibre
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers
Filter Housing	Zintec mild steel
Filter Efficiency	F8 (95% @ 0.9 microns)

COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m² approx	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs	
Filter Efficiency	99.997% @ 0.3 microns	




BOFA INTERNATIONAL LTD

Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk

BOFA AMERICAS, INC

Tel: (618) 205 5007 Fax: (866) 707 2632 Email: sales@bofaamericas.com Web: www.bofaamericas.com

AIRFLOW THROUGH FILTERS

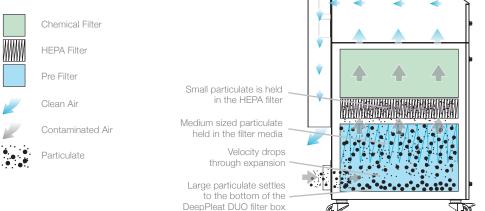

TECHNICAL SPECIFICATION

- iQ Display
 On / Off Switch
- 3 Power Cable
- 4 Signal / Interface Cable
- 5 Castors
- 6 Door Hinge
- 7 Hose Inlet Connection - 125mm
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet
- 10 Door Latch
- 11 Motor Cooling Outlet
- 12 Standby Button

