





PrintPRO 3

for table top enclosed/partially enclosed 3D printers

The BOFA 3D PrintPRO 3 incorporates externally mounted plenum system manifolds, which effectively captures fumes generated during the printing process and returns ultra clean, filtered air to the operator's breathing zone.

The BOFA 3D PrintPRO 3 has the benefits of low cost, low power consumption and integral speed control. Each filtration unit is supplied with connection hoses and 'print your own' manifold instructions.

STANDARD FEATURES:

- · Digital speed control
- Filter change indicator
- 3 level filtration Pre and HEPA/chemical filters
- Hose kit included.
- Low noise level
- Powder coated for durability
- Small footprint
- Compact size
- CE approvals

OPTIONAL FEATURES:

 24V Remote stop / start interface

TECHNOLOGY:




HEPA filter technology



Advanced Carbon Filter technology



SureCheck Quality Standard

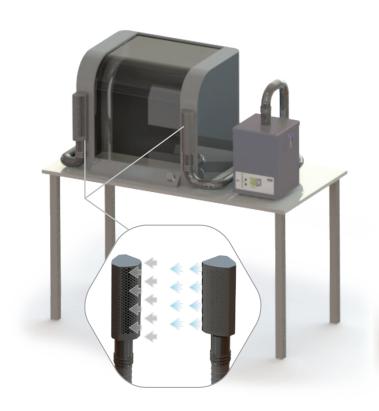









| UNIT PART NUMBERS | | OPTIONS |
|-----------------------------|----------|------------------|
| Model | Part No. | 24V Stop / Start |
| 3D PrintPRO 3 Powder Coated | L5544 | A2001 |


| REPLACEMENT FILTER PART NUMBERS | | |
|---------------------------------|----------------|--------------------------|
| Model | Pre Filter Pad | Combined HEPA/Gas Filter |
| 3D PrintPRO 3 | A1030102 | A1030099 |


| TECHNICAL DATA | | | |
|----------------------|---|---|--|
| | EU | US | |
| Dimensions (HxWxD) | 413 x 260 x 297mm | 16.3 x 10.2 x 11.7" | |
| Cabinet Construction | Powder coated mild steel | Powder coated mild steel | |
| Airflow / Pressure | 150m ³ /hr | 88cfm | |
| Electrical Data | 230v 1ph 50/60Hz Full load current: 0.6 amps | 115v 60/50Hz Full load current: 1.2 amps | |
| Noise Level | < 56dBA* | < 56dBA* | |
| Weight | 10.5kgs | 23lbs | |
| Approvals | CE | | |

| PRE FILTER SPECIFICATIONS | | |
|---------------------------|------------------------|--|
| Filter Media | Polypropylene, Acrylic | |
| Filter Media Construction | Pad | |
| Filter Efficiency | F7 (96% @ 2 microns) | |

| COMBINED HEPA/GAS FILTER SPECIFICATIONS | | |
|---|--|--|
| HEPA Filter Media | Glass Fibre | |
| HEPA Media Construction | Maxi Pleat Construction with Webbing Spacers | |
| Gas Filter | Treated Activated Carbon | |
| Filter Housing | Zintec Mild Steel | |
| Filter Efficiency | 99.997% @ 0.3 microns | |



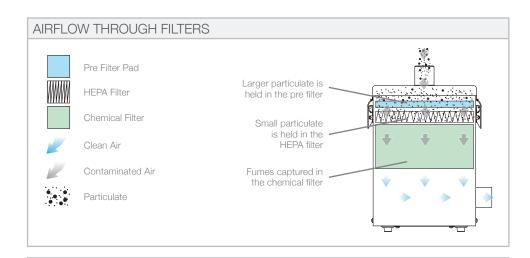

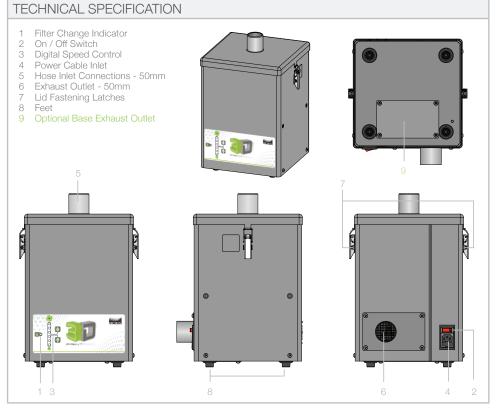





Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk









REACH RoHS